



CHVTP 200 (50 gpm)



Applications:

- Up to Six Self Serve Bays + Roll Over Automatics with moderate water needs or small tunnel
- Ideal for undercarriage and side blaster applications (touchless) and all friction applications

Features:

- Three Stage Filtration and Four Stage Propriety Degerming
- Timers for multiple system/function controls
- Onboard header tank and 3 hp delivery pump for direct application to wash
- Hydro-cyclones and flocculation for water filtration
- Upgradeable to CHVTP 400 (100 gpm) or CHVTP 600 (155 gpm)
- One hour quarterly maintenance

Technical Product Data

| | |
|-------------------------------|--------------|
| CHVTP Model No. | 200 |
| Gallons per Minute | 50 |
| Dimensions | |
| Machine Only: | |
| Length | 4' 8" |
| Depth | 3' |
| Height | 5' 1" |
| Allowance M/C left for piping | 1'-2' |
| Weight (approx) Lbs. | 400 |
| Electrical | |
| Phases/Amps | 3 Phase/ 40A |
| # of High Voltage Electrodes | One |
| Degerming | |
| # of Water Stabilizers | One |
| Filtration | |
| # of Cyclone Filters | Two |
| Pumps | |
| # of Pressure Pumps | One |
| # of Suction Pumps | One |



FREYLIT USA Inc.

1809 Associates Lane Suite D Charlotte NC 28217

Phone: 704-424-1006 Fax: 866-430-7769

Email: admin@freylitusa.com Website: www.freylitusa.com



Why Choose Freylit?

- Freylit has gained international experience from installations in over 35 countries, with 10,000 reclaim and oil water separator systems installed during the last 25 years. Our major clients have included: Chevron, Exxon, Texaco, Shell, BP and Mobil.
- Does not use any corrosive ozone or dangerous chemicals to degerm the water and is deemed a "Green Build Application".
- Odor control using Freylit's proprietary water stabilizer, unique voltage electrode and exclusive 7,200 head diffused air membrane.
- Three stage dirt removal for easy system operation and long term easy maintenance.
- No changing of messy and/or expensive filters is needed daily, weekly, or even annually.





Process Description

Floataion (Air) Membrane

The floataion membrane assists flakes created by the high voltage electrode to be lifted to the tank surface. This dirt layer is drained periodically back to the silt chamber. A secondary usage of the membrane is to oxygenate the water to prevent the growth of foul smelling bacteria.

Freylit Water Stabilizer

The water stabilizer works by a physio-kinetic process and does not need electricity, chemicals or maintenance. The water passes through a double walled cylinder, which contains a high-energetic medium. As the water flows through the Water Stabilizer, the water molecules are 'excited', activating the oxygen contained in the water, preventing the development of germs and bacteria.

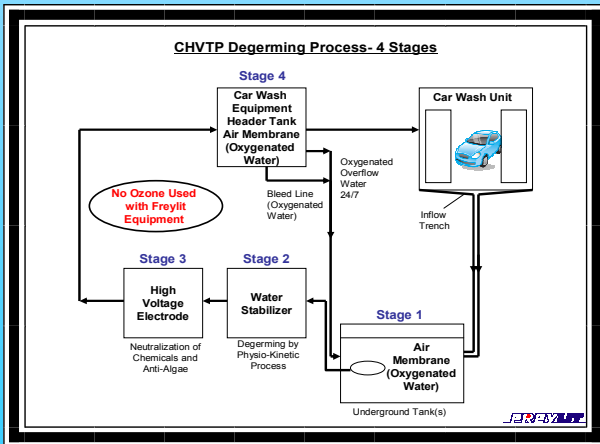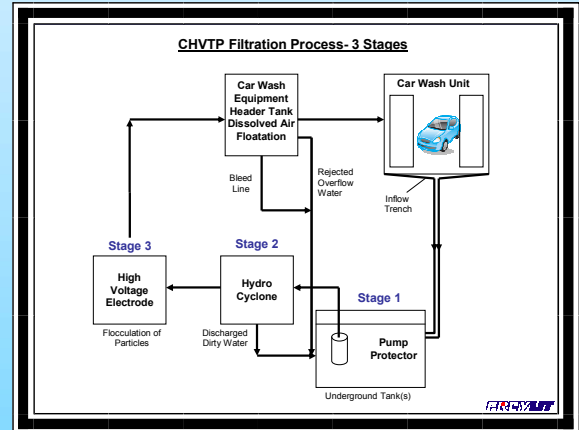

Hydro-Cyclone

Large suspended solids are separated and returned to the silt chamber.

High Voltage Electrode

The recycling water passes through a pipe equipped with a high voltage electrode which causes flocculation of the suspended solids, killing bacteria and preventing the growth of algae.